




**For Security
Vari-Focal**

Applicable camera (model)


DV5×3.6R4B-2



5×




- VARI**
Vari-Focal
- WIDE**
Wide Angle
- TELE**
Telephoto
Long Focal
- Day~
Night**
Day & Night
- MANUAL**
Manual Iris
- CS-mt**
CS Mount
- METAL**
Metal Mount
- ND**
ND Filter
- AT**
Aspherical Lens

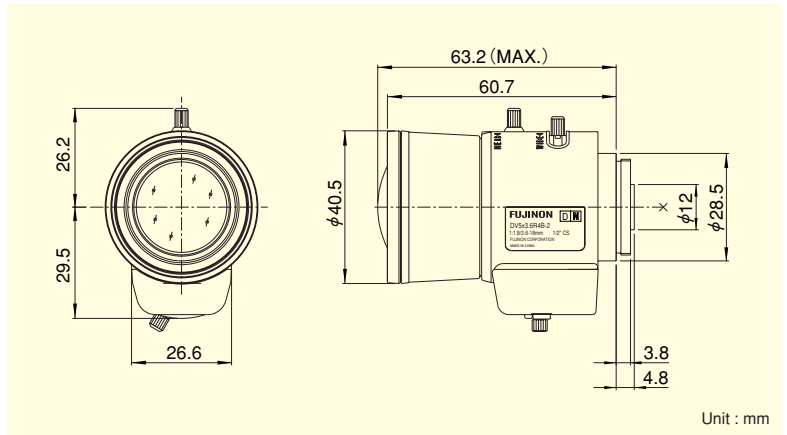

- Advanced design engineering and special optic glass adopted, best suited for color, Black and White and Day and Night cameras.
- Compatible with a wide range - 1/2", 1/3" and 1/4" - cameras.
- Broad range of f3.6-18mm, supporting various applications.
- High accuracy aspheric lens adopted, achieving the high quality image.
- Built-in ND filter of T360, supporting high sensitivity cameras.

Focal Length (mm)		3.6~18 (5×)	
Iris Range		F1.8 ~ T360·C	
Operation	Zoom	Manual	
	Focus	Manual	
	Iris	Manual	
Angle Of View (H×V)	1/2"	WIDE	95°54' × 72°24'
		TELE	19°57' × 15°09'
	1/3"	WIDE	72°24' × 54°25'
		TELE	15°09' × 11°26'
	1/4"	WIDE	54°25' × 40°50'
		TELE	11°26' × 8°37'
Focusing Range (From Front Of The Lens) (m)		∞ ~ 0.3	
Object Dimensions at M.O.D. (H×V) (mm)	1/2"	WIDE	694 × 457
		TELE	110 × 83
	1/3"	WIDE	457 × 321
		TELE	83 × 62
	1/4"	WIDE	321 × 232
		TELE	62 × 47
Back Focal Distance (in air) (mm)		7.87	
Exit Pupil Position (From Image Plane) (mm)		-81	
Filter Thread (mm)		—	
Mount		CS	
Mass (g)		65	
Remarks		•With Metal Mount	

[Lens Image]

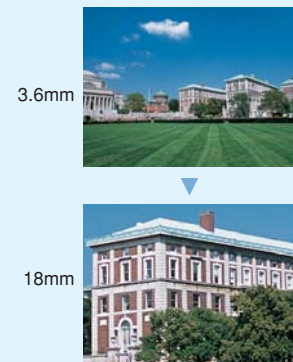

VARI-FOCAL LENSES